

SWCV TYPE

FEATURES:

- * INVESTMENT CASTING
- * STANDARD: DIN/ANSI
- * Rating: ANSI150/PN16
- * Size: 2" – 8" (DN50-DN200)
- * Material: ASTM A 351-CF8M/CF8
- * Body/Clapper Seat: NBR/FPM/PTFE/VITON/Metal to Metal
- * Face To Face: API-594 / API-6D
- * Test Standard: API-598
- * Design: ASME-B16.34
- * Suit Flanged For: ISO-7005-1


FLOW COEFFICIENT (CV)		
DN	DN	CV
50	2"	42
65	2-1/2"	73
80	3"	107
100	4"	329
125	5"	646
150	6"	747
200	8"	1338

DIMENSIONS					
DN	L	D	d	Wt (Kg)	
50	2"	19	105	27	1.2
65	2-1/2"	19	124	38	1.6
80	3"	19	137	46	1.9
100	4"	19	175	69	2.7
125	5"	19	197	90	4.0
150	6"	19	222	110	5.7
200	8"	19	279	140	11.5



CE APPROVED

SIZE: 2" – 8" / WAFER

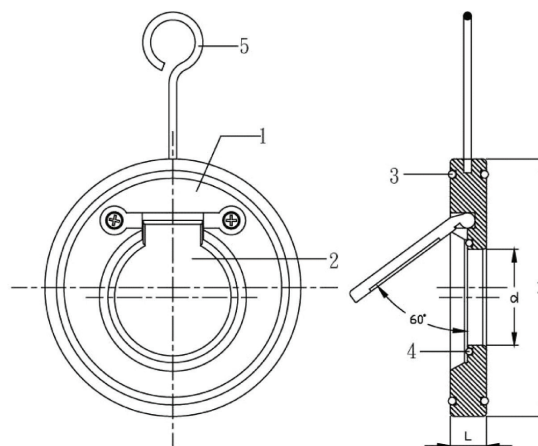

HOW TO ORDER

SWCV - SIZE - RATING - BODY MATERIAL - SEAT MATERIAL

PART	MATERIAL
1 BODY	A351 CF8M
2 CLAPPER	A351 CF8M
3 BODY SEAT	NBR/FPM/PTFE/VITON/METAL
4 CLAPPER SEAT	NBR/FPM/PTFE/VITON/METAL
5 O-BOLT	304 SST



MORRIS VALVES
SERVING THE WORLD, ONE PROJECT AT A TIME