


2 PIECE
SCREWED END: NPT, BSPT, BSPP



SIZE: 1/4" - 4"

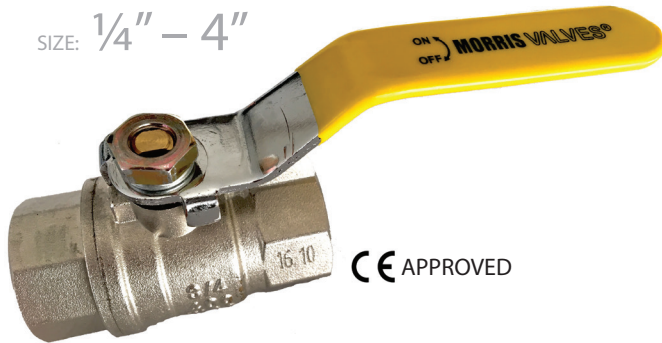

CE APPROVED

HOW TO ORDER

2B400G - BODY MATERIAL - SIZE - FT - END CONNECTIONS

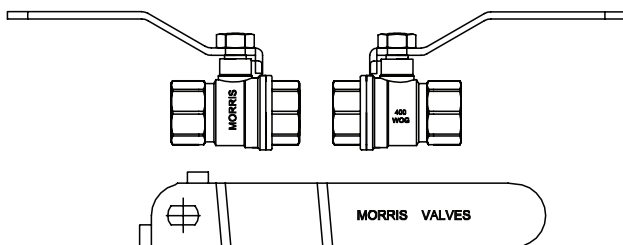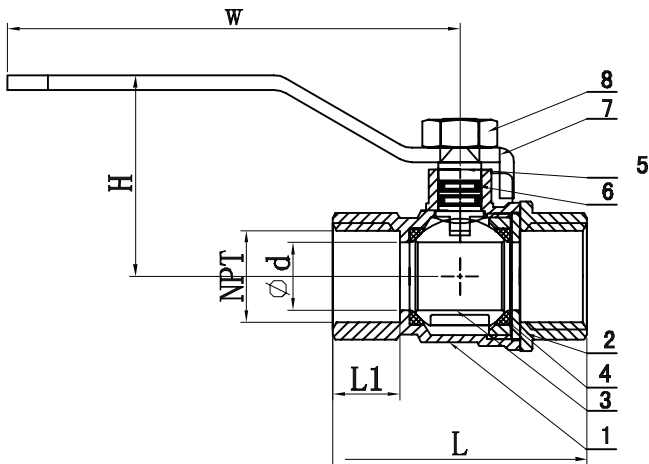

2B400G TYPE

FEATURES:

- * FULL PORT
- * 400 PSI W.O.G.
- * 2-PC BODY
- * STEM THRUST WASHER
- * BLOW-OUT PROOF STEM
- * MATERIAL & TEST CERTIFICATE: EN 10254-3.1
- * API 598 TESTED EACH PIECE.
- * 12 MONTH WARRANTY
- * PIPE THREAD IN ACCORDANCE WITH:
 - ANSI/ASME B1.20.1 (NPT)
 - BS21:1973
 - DIN259/2999
 - ISO228

MATERIALS:

- * ASTM B283 BRASS (NAKED OR NICKEL PLATED)

OPTION:


- * DRILLING & TAPPED MOUNTING PAD

MAIN APPLICATION:

- * NATURAL GAS. RESIDENTIAL APPLICATION

NOMINAL SIZE	ØD	L	H	W	Weight (gr)
1/4"	10	46	39	73	130
3/8"	10	46	39	73	120
1/2"	14	53	47	90	160
3/4"	18	63	51	102	230
1"	23	72	57	116	410
1-1/4"	30	78	63	134	620
1-1/2"	35	86	76	134	860
2"	43	100	83	166	1.39
2-1/2"	56	127	114	225	3.30
3"	65	140	120	260	4.10
4"	79	187	136	260	7.35

PRESSURE - TEMPERATURE
2B4002K SIZE: 1/4" - 4"

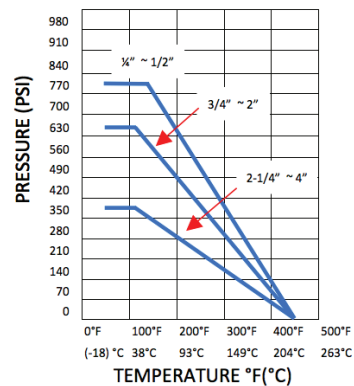

MORRIS VALVES
SHIPPING THE WORLD ONE PRODUCT AT A TIME